



4K HDR

HDCP 2.2



# SDV-CTR

Full HDR and 4K SDVoE Transceiver over CAT (10GbE).

**OPERATION MANUAL**



## **DISCLAIMERS**

The information in this manual has been carefully checked and is believed to be accurate. CYP (UK) Ltd assumes no responsibility for any infringements of patents or other rights of third parties which may result from its use.

CYP (UK) Ltd assumes no responsibility for any inaccuracies that may be contained in this document. CYP (UK) Ltd also makes no commitment to update or to keep current the information contained in this document.

CYP (UK) Ltd reserves the right to make improvements to this document and/or product at any time and without notice.

## **COPYRIGHT NOTICE**

No part of this document may be reproduced, transmitted, transcribed, stored in a retrieval system, or any of its part translated into any language or computer file, in any form or by any means—electronic, mechanical, magnetic, optical, chemical, manual, or otherwise—without express written permission and consent from CYP (UK) Ltd.

© Copyright 2011 by CYP (UK) Ltd.

All Rights Reserved.

Version 1.1 August 2011

## **TRADEMARK ACKNOWLEDGMENTS**

All products or service names mentioned in this document may be trademarks of the companies with which they are associated.

## SAFETY PRECAUTIONS

Please read all instructions before attempting to unpack, install or operate this equipment and before connecting the power supply.

Please keep the following in mind as you unpack and install this equipment:

- Always follow basic safety precautions to reduce the risk of fire, electrical shock and injury to persons.
- To prevent fire or shock hazard, do not expose the unit to rain, moisture or install this product near water.
- Never spill liquid of any kind on or into this product.
- Never push an object of any kind into this product through any openings or empty slots in the unit, as you may damage parts inside the unit.
- Do not attach the power supply cabling to building surfaces.
- Use only the supplied power supply unit (PSU). Do not use the PSU if it is damaged.
- Do not allow anything to rest on the power cabling or allow any weight to be placed upon it or any person walk on it.
- To protect the unit from overheating, do not block any vents or openings in the unit housing that provide ventilation and allow for sufficient space for air to circulate around the unit.

## REVISION HISTORY

VERSION NO.	DATE	SUMMARY OF CHANGE
v1.00	08/02/2019	First release
v1.01	04/06/2019	Corrected Cover Image

# CONTENTS

<b>1. Introduction</b> .....	<b>6</b>
<b>2. Applications</b> .....	<b>6</b>
<b>3. Package Contents</b> .....	<b>6</b>
<b>4. System Requirements</b> .....	<b>6</b>
<b>5. Features</b> .....	<b>8</b>
<b>6. Operation Controls and Functions</b> .....	<b>9</b>
6.1 Front Panel .....	9
6.2 Rear Panel .....	10
6.3 IR Cable Pinouts .....	11
6.4 OSD Menu .....	12
6.5 Basic AV Extension .....	16
<b>7. Connection Diagram</b> .....	<b>17</b>
<b>8. Specifications</b> .....	<b>18</b>
8.1 Technical Specifications .....	18
8.2 Video Specifications .....	19
8.3 Audio Specifications .....	20
8.4 Cable Specifications .....	21
<b>9. Acronyms</b> .....	<b>22</b>

## 1. INTRODUCTION

This Transceiver is designed for high-quality, IP routable, AV extension with minimum latency. Every Transceiver can be configured to function as either a Transmitter or a Receiver, enhancing the flexibility of any installation. By using a sophisticated ultra-light compression scheme (lossless for most content) it's a great solution for extending 4K HDMI audio/video streams and data. Advanced HDMI content such as HDR (High Dynamic Range), 10-bit colour and multi-channel HD Bitstream audio can be transmitted in pass-through mode. The use of high quality 10-Gigabit Ethernet ports and Cat.6A cable allows for point-to-point transmission of the video signal up to 100m. Multiple control and data signals may also be transmitted along with the audio and video, including IR, RS-232, and Ethernet.

## 2. APPLICATIONS

- /// Video, Audio, LAN, IR and RS-232 over Ethernet extension
- /// Hotel or convention centre display
- /// Long distance data and video transmission immune to RF interference

## 3. PACKAGE CONTENTS

- /// 1×HDMI over IP (10GbE) Transceiver
- /// 1×12V/3A DC Power Adapter
- /// 1×Power Cord
- /// 1×3-pin Terminal Block to DE-9 (Male) Adapter Cable
- /// 1×3-pin Terminal Block to DE-9 (Female) Adapter Cable
- /// 1×Shockproof Feet (Set of 4)
- /// 1×Operation Manual

## 4. SYSTEM REQUIREMENTS

- /// HDMI source equipment such as a media player, video game console, PC, or set-top box.
- /// HDMI receiving equipment such as an HDTV, monitor, or audio amplifier.


- /// Analogue audio receiving equipment such as headphones, an audio amplifier or powered speakers.
- /// A 10 Gigabit Ethernet network switch with jumbo frame and IGMP snooping support is required for distributed video systems. (Optional, required for multi-Tx/Rx systems)
- /// PC control software or control system hardware to configure distributed matrix, video wall or multi-view systems. (Optional)

## 5. FEATURES

- /// HDMI 2.0 and DVI 1.0 compatible
- /// HDCP 2.2 and HDCP 1.x compliant
- /// Can be configured to function as either a Transmitter or a Receiver
- /// 1 HDMI input
- /// 1 HDMI output (Functions as local monitor output in Transmitter Mode)
- /// 1 analogue stereo jack (Functions as an input in Transmitter Mode and an output in Receiver Mode)
- /// Ultra-light compression, lossless for most content
- /// Extension up to 100m in point-to-point mode (w/ Cat.6A cable)
- /// Supports pass-through of 10/12-bit HDR sources (Point-to-Point and Genlock mode only)
- /// Supports pass-through of audio formats including LPCM 2.0/5.1/7.1, Bitstream and HD Bitstream from HDMI sources
- /// Analogue stereo audio extension, insertion and extraction (insertion and extraction requires optional control center/software)
- /// Bidirectional LAN, IR & RS-232 extension
- /// Unit can be powered directly by PoE when connected to a 10-Gigabit Ethernet (10GbE) switch that provides PoE (802.3af)
- /// Signal transmission interfaces with 10-Gigabit Ethernet switches via a single Cat.6A cable
- /// Basic configuration via front panel buttons with an On-Screen Display (OSD)


## 6. OPERATION CONTROLS AND FUNCTIONS

### 6.1 Front Panel

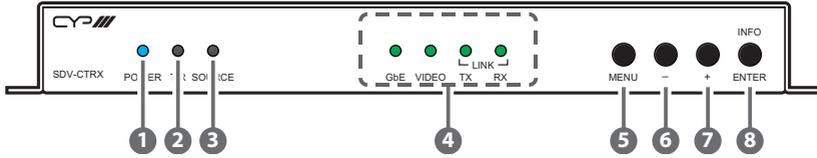

- 1 POWER LED:** This LED will illuminate to indicate the unit is on and receiving power.
- 2 T/R LED:** This LED indicates if the unit is in Transmitter (Green LED) or Receiver (Amber LED) mode.
- 3 SOURCE LED:** This LED will illuminate when the local HDMI input is live and selected.
- 4 STREAMING STATUS LED BLOCK:**
  - A GbE LED:** This LED will illuminate and blink to indicate a live and active connection on the gigabit Ethernet port.
  - B VIDEO LED:** This LED will illuminate when a video signal is live on the 10GbE streaming port. When no video is active the LED will remain off, even if the streaming connection is valid.
  - C TX & RX LINK LEDs:** These LEDs will illuminate and blink to indicate data transmission and reception activity across the 10GbE streaming connection.
- 5 MENU BUTTON:** Press to enter the OSD menu, or to back out from menu items.
- 6 – (MINUS) BUTTON:** Press to move down or adjust selections within OSD menus. When not in a menu, press to manually toggle between inputs.
- 7 + (PLUS) BUTTON:** Press to move up or adjust selections within OSD menus. When not in a menu, press to manually toggle between inputs.
- 8 ENTER/INFO BUTTON:** When inside an OSD menu, press to confirm a selection within the OSD or to go deeper into a menu item. When not in a menu, press to activate the Information OSD.


## 6.2 Rear Panel

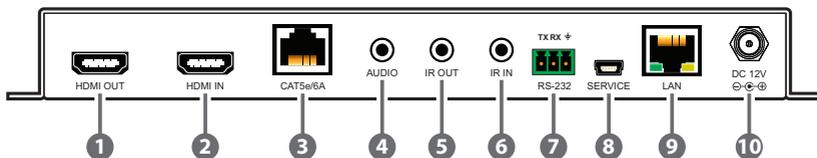


- 1 **HDMI OUT PORT:** Connect to an HDMI TV, monitor or amplifier for digital video and audio output.
- 2 **HDMI IN PORT:** Connect to HDMI source equipment such as a media player, game console or set-top box.
- 3 **CAT5e/6A PORT:** Connect directly to a compatible Transmitter/ Receiver, or to a 10 gigabit Ethernet switch, with a single Cat.5e/6/7 cable for transmission of all data signals.  
*Note: If the connected network switch supports the IEEE 802.3af PoE (Power over Ethernet) standard, this unit can optionally be powered directly via this Ethernet port.*
- 4 **AUDIO PORT:**
  - A **Transmitter Mode:** Connect to the stereo analogue output of a device such as a CD player or PC. The audio signal is passed directly to the audio port on the connected Receiver.
  - B **Receiver Mode:** Connect to powered speakers or an amplifier for stereo analogue audio output. The audio signal comes directly from the audio port on the connected Transmitter.
- 5 **IR OUT PORT:** Connect to an IR Blaster to transmit IR signals to devices within direct line-of-sight of the IR Blaster.
- 6 **IR IN PORT:** Connect to an IR Extender to extend the IR control range of remotely located devices. Ensure that the remote being used is within direct line-of-sight of the IR Extender.
- 7 **RS-232 TERMINAL BLOCK:** Reserved for future use.
- 8 **SERVICE PORT:** This port is reserved for firmware update use only.
- 9 **LAN PORT:** Connect to an Ethernet supporting device or to your local network as appropriate to extend the network between the Transmitter and Receiver.
- 10 **DC 12V PORT:** Plug the 12V DC power adapter into this port and connect it to an AC wall outlet for power (Optional, not required if the unit is powered via PoE).

### 6.3 IR Cable Pinouts

IR Blaster Cable

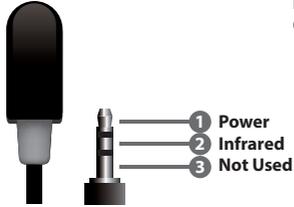

IR Extender Cable



## 6.4 OSD Menu

Many functions of this unit can be controlled by using the OSD (On Screen Display) which is activated by pressing the Menu button on the front of the unit. Use the + (PLUS), – (MINUS), and ENTER buttons to navigate the OSD menu. Press the Menu button to back out from any menu item and then press it again to close the menu.

MAIN MENU
OSD
EDID
HDCP
<b>Device Setting</b>
<b>Information</b>
<b>Factory Setting</b>

The individual functions of the OSD will be introduced in the following section. Items marked in **BOLD** are the factory default settings.

OSD	
2ND LEVEL	3RD LEVEL
Display Information	<b>ON</b>
	Off
Information Timeout	Off
	10~40 Sec [ <b>10 Sec</b> ]
Menu Timeout	Off
	10~40 Sec [ <b>10 Sec</b> ]

- 1) **Display Information:** Enable or disable the Information OSD.
- 2) **Information Timeout:** Set the display timeout for the Information OSD.
- 3) **Menu Timeout:** Set the display timeout for the OSD Menu.

EDID	
2ND LEVEL	3RD LEVEL
EDID Select	<b>INTERNAL 1</b>
	Internal 2
	Internal 3
	Internal 4
	Internal 5
	Internal 6
	External A
	External B (Transmitter Mode only)
	User 1
	User 2

**1) EDID Select:** Select the EDID to send to the HDMI input. This unit provides the following 6 Internal EDIDs:

<b>Internal 1</b>	1920×1080p@60Hz (148MHz), 8-bit colour	LPCM 2.0
<b>Internal 2</b>	1920×1080p@60Hz (148MHz), 8-bit colour	LPCM 7.1 & Bitstream
<b>Internal 3</b>	3840×2160p@30Hz (297MHz), Deep Colour (8/10/12-bit)	LPCM 2.0
<b>Internal 4</b>	3840×2160p@30Hz (297MHz), Deep Colour (8/10/12-bit)	LPCM 7.1 & Bitstream
<b>Internal 5</b>	3840×2160p@60Hz (594MHz), Deep Colour (8/10/12-bit)	LPCM 2.0
<b>Internal 6</b>	3840×2160p@60Hz (594MHz), Deep Colour (8/10/12-bit)	LPCM 7.1 & Bitstream

*Note: In some rare cases it is possible for custom or external EDIDs to cause compatibility issues with certain sources. If this happens, it is recommended to switch to one of the 6 default EDIDs for maximum compatibility.*

HDCP	
2ND LEVEL	3RD LEVEL
HDMI HDCP	Follow In
	<b>FOLLOW OUT</b>
	Disable

- 1) **HDMI HDCP:** Set the HDCP behavior of the HDMI input.
  - **Follow In:** The input supports up to the HDCP version required by the connected source.
  - **Follow Out:** The input supports up to the HDCP version supported by the connected display.
  - **Disable:** HDCP support is completely disabled.

DEVICE SETTING	
2ND LEVEL	3RD LEVEL
Status	<b>TRANSMITTER</b>
	Receiver
Fan Mode	<b>FOLLOW TEMP</b>
	Always On
Input (Receiver Mode only)	Input 1
	<b>INPUT 2</b>
Local Priority (Receiver mode only)	On
	<b>OFF</b>

- 1) **Status:** Set the operational mode of the Transceiver. After changing the operation mode, the unit will automatically reboot.
- 2) **Fan Mode:** Set the fan’s activation behavior. Selecting “Follow temp” will result in the fan only turning on if the internal temperature becomes too high.
- 3) **Input:** Select the source to display on the HDMI output. Input 1 is the local HDMI input, Input 2 is the 10GbE streaming video input.

*Note: Only available when the unit is in Receiver Mode.*

- 4) **Local Priority:** Enable or disable the priority auto switch mode for the HDMI input. When enabled, the unit will automatically switch to the HDMI input if a live signal is present.

*Note: Only available when the unit is in Receiver Mode.*

INFORMATION	
2ND LEVEL	3RD LEVEL
Resolution	[Show the current status of each item]
Status	
FW Version	
IP	
MAC	
SN	
Fan Status	

- 1) **Information:** Shows details of the unit's current status including detected input resolution, transceiver mode, firmware version, IP address, MAC address, serial number and fan state.

FACTORY SETTING	
2ND LEVEL	3RD LEVEL
Are you sure?	<b>NO</b>
	Yes

- 1) **Factory Setting:** Selecting YES will reset all of the unit's settings back to their factory defaults.

## 6.5 Basic AV Extension


### /// Point-to-Point Configuration and Operation

The most basic extension configuration available is a point-to-point system with a single unit in Transmitter Mode connected directly to a single unit in Receiver Mode. In this configuration the HDMI input on the Transmitter is transmitted to the connected Receiver without modification to the audio or video format. The analogue stereo audio port on the Transmitter functions as an input and transfers audio directly to the analogue stereo audio port on the Receiver for output. The LAN, RS-232, and IR ports form direct connections between Transmitter and Receiver.



*Note: No audio insertion/extraction is performed in this configuration.*

# 7. CONNECTION DIAGRAM

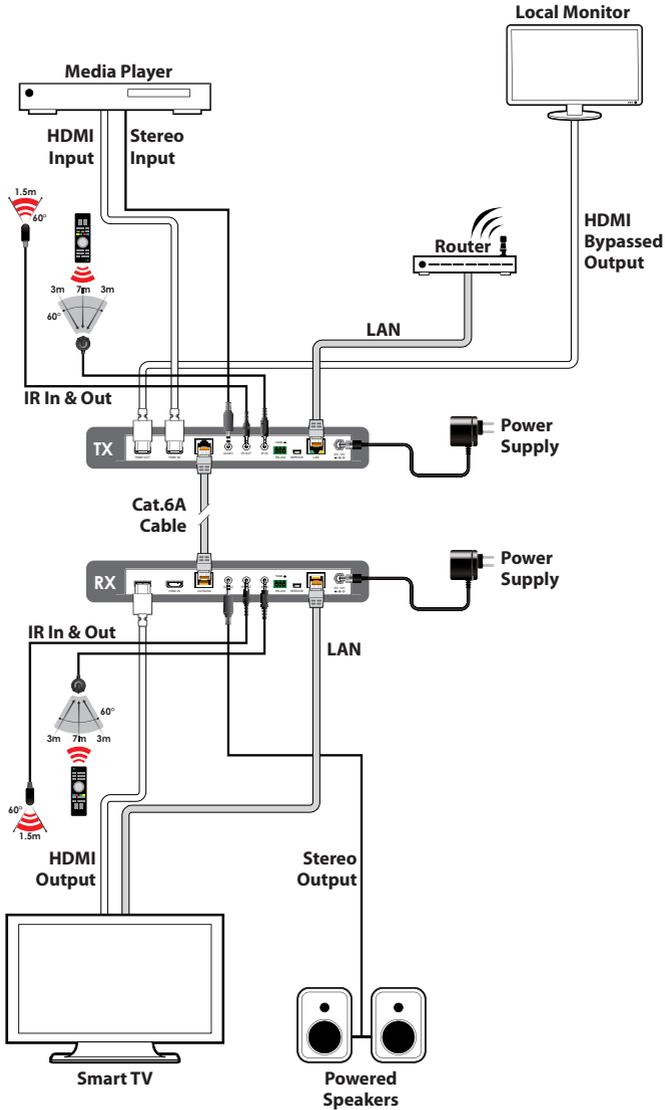

## 8. SPECIFICATIONS

### 8.1 Technical Specifications

<b>HDMI Bandwidth</b>	600MHz/18Gbps
<b>Input Port</b>	1×HDMI
<b>Output Port</b>	1×HDMI
<b>Bidirectional Port</b>	1×10GbE LAN (RJ-45)
<b>Pass-through Ports</b>	1×Analogue Stereo (3.5mm) 1×IR Blaster (3.5mm) 1×IR Extender (3.5mm) 1×RS-232 (3-pin Terminal Block)
<b>Control/Pass-through Port</b>	1×LAN (RJ-45)
<b>IR Frequency</b>	30 – 50kHz (30 – 60kHz under ideal conditions)
<b>Baud Rate</b>	Up to 115200
<b>Power Supply</b>	12V/3A DC (US/EU standards, CE/FCC/UL certified)
<b>ESD Protection</b>	Human Body Model: ±8kV (Air Discharge) ±4kV (Contact Discharge)
<b>Dimensions</b>	231.5mm×25mm×108mm (W×H×D) [Case Only] 231.5mm×25mm×116.7mm (W×H×D) [All Inclusive]
<b>Weight</b>	552g
<b>Chassis Material</b>	Metal (Steel)
<b>Silkscreen Colour</b>	Black
<b>Operating Temperature</b>	0 °C – 40 °C/32 °F – 104 °F
<b>Storage Temperature</b>	-20 °C – 60 °C/-4 °F – 140 °F
<b>Relative Humidity</b>	20 – 90% RH (Non-condensing)
<b>Power Consumption</b>	24.5W

## 8.2 Video Specifications

Supported Resolutions (Hz)	Input	Output	10GbE
	HDMI	HDMI	Cat.6a
<b>720x400p@70/85</b>	✓	✓	✓
<b>640x480p@60/72/75/85</b>	✓	✓	✓
<b>720x480i@60</b>	✓	✓	✓
<b>720x480p@60</b>	✓	✓	✓
<b>720x576i@50</b>	✓	✓	✓
<b>720x576p@50</b>	✓	✓	✓
<b>800x600p@56/60/72/75/85</b>	✓	✓	✓
<b>848x480p@60</b>	✓	✓	✓
<b>1024x768p@60/70/75/85</b>	✓	✓	✓
<b>1152x864p@75</b>	✓	✓	✓
<b>1280x720p@50/60</b>	✓	✓	✓
<b>1280x768p@60RB/60/75/85</b>	✓	✓	✓
<b>1280x800p@60RB/60/75/85</b>	✓	✓	✓
<b>1280x960p@60/85</b>	✓	✓	✓
<b>1280x1024p@60/75/85</b>	✓	✓	✓
<b>1360x768p@60</b>	✓	✓	✓
<b>1366x768p@60RB/60</b>	✓	✓	✓
<b>1400x1050p@60RB/60</b>	✓	✓	✓
<b>1440x900p@60RB/60/75</b>	✓	✓	✓
<b>1600x900p@60RB</b>	✓	✓	✓
<b>1600x1200p@60</b>	✓	✓	✓
<b>1680x1050p@60RB/60</b>	✓	✓	✓
<b>1920x1080i@50/60</b>	✓	✓	✓
<b>1920x1080p@24/25/30</b>	✓	✓	✓

Supported Resolutions (Hz)	Input	Output	10GbE
	HDMI	HDMI	Cat.6a
<b>1920×1080p@50/60</b>	✓	✓	✓
<b>1920×1200p@60RB</b>	✓	✓	✓
<b>2560×1440p@60RB</b>	✓	✓	✓
<b>2560×1600p@60RB</b>	✓	✓	✓
<b>2048×1080p@24/25/30</b>	✓	✓	✓
<b>2048×1080p@50/60</b>	✓	✓	✓
<b>3840×2160p@24/25/30</b>	✓	✓	✓
<b>3840×2160p@50/60 (4:2:0)</b>	✓	✓	✓
<b>3840×2160p@24/25/30, HDR10</b>	✓	✓	✓
<b>3840×2160p@50/60 (4:2:0), HDR10</b>	✓	✓	✓
<b>3840×2160p@50/60</b>	✓	✓	✓
<b>4096×2160p@24/25/30</b>	✓	✓	✓
<b>4096×2160p@50/60 (4:2:0)</b>	✓	✓	✓
<b>4096×2160p@24/25/30, HDR10</b>	✓	✓	✓
<b>4096×2160p@50/60 (4:2:0), HDR10</b>	✓	✓	✓
<b>4096×2160p@50/60</b>	✓	✓	✓

### 8.3 Audio Specifications

HDMI Input/Output	
LPCM	
<b>Max Channels</b>	8 Channels
<b>Sampling Rate (kHz)</b>	32, 44.1, 48
Bitstream	
<b>Supported Formats</b>	Standard & High-Definition

Analogue Input	
<b>Max Audio Level</b>	1Vrms
<b>Impedance</b>	10kΩ
<b>Type</b>	Unbalanced

Analogue Output	
<b>Max Audio Level</b>	1Vrms
<b>THD+N</b>	< -80dB@0dBFS 1kHz (A-wt)
<b>SNR</b>	> 80dB@0dBFS
<b>Frequency Response</b>	< ±1dB@20Hz~20kHz
<b>Crosstalk</b>	< -80dB@10kHz
<b>Impedance</b>	470Ω
<b>Type</b>	Unbalanced

## 8.4 Cable Specifications

Cable Length	1080p		4K30	4K60
	8-bit	12-bit	(4:4:4) 8-bit	(4:4:4) 8-bit
<b>High Speed HDMI Cable</b>				
<b>HDMI Input</b>	15m	10m	5m	3m
<b>HDMI Output</b>	15m	10m	5m	3m
<b>Ethernet Cable</b>				
<b>Cat.5e</b>	100m		70m	
<b>Cat.6</b>	100m		70m	
<b>Cat.6A</b>	100m			

## 9. ACRONYMS

ACRONYM	COMPLETE TERM
<b>10GbE</b>	10 Gigabit Ethernet
<b>ASCII</b>	American Standard Code for Information Interchange
<b>Cat.5e</b>	Enhanced Category 5 cable
<b>Cat.6A</b>	Augmented Category 6 cable
<b>Cat.7</b>	Category 7 cable
<b>DHCP</b>	Dynamic Host Configuration Protocol
<b>DVI</b>	Digital Visual Interface
<b>EDID</b>	Extended Display Identification Data
<b>GbE</b>	Gigabit Ethernet
<b>HD</b>	High-Definition
<b>HDCP</b>	High-bandwidth Digital Content Protection
<b>HDMI</b>	High-Definition Multimedia Interface
<b>HDR</b>	High Dynamic Range
<b>HDTV</b>	High-Definition Television
<b>IP</b>	Internet Protocol
<b>IR</b>	Infrared
<b>LAN</b>	Local Area Network
<b>LED</b>	Light-Emitting Diode
<b>LPCM</b>	Linear Pulse-Code Modulation
<b>OSD</b>	On-Screen Display
<b>PoE</b>	Power over Ethernet
<b>SNR</b>	Signal-to-Noise Ratio
<b>THD+N</b>	Total Harmonic Distortion plus Noise
<b>UHD</b>	Ultra-High-Definition
<b>USB</b>	Universal Serial Bus
<b>WUXGA (RB)</b>	Widescreen Ultra Extended Graphics Array (Reduced Blanking)





---

CYP (UK) Ltd., Unit 7, Shepperton Business Park, Govett Avenue, Shepperton,  
Middlesex, TW17 8BA

Tel: +44 (0) 20 3137 9180 | Fax: +44 (0) 20 3137 6279

Email: [sales@cypeurope.com](mailto:sales@cypeurope.com)

[www.cypeurope.com](http://www.cypeurope.com)

v1.01