



**HDBT**<sup>®</sup>  
**4K2K**  
**HDCP2.2**



## PUV-1602TXWP

**HDMI/VGA over Single CAT5e/6/7 HDBaseT™ Wallplate Transmitter (Full 5Play™ & Single LAN up to 100m, PoH)**

**OPERATION MANUAL**



## **DISCLAIMERS**

The information in this manual has been carefully checked and is believed to be accurate. CYP (UK) Ltd assumes no responsibility for any infringements of patents or other rights of third parties which may result from its use.

CYP (UK) Ltd assumes no responsibility for any inaccuracies that may be contained in this document. CYP (UK) Ltd also makes no commitment to update or to keep current the information contained in this document.

CYP (UK) Ltd reserves the right to make improvements to this document and/or product at any time and without notice.

## **COPYRIGHT NOTICE**

No part of this document may be reproduced, transmitted, transcribed, stored in a retrieval system, or any of its part translated into any language or computer file, in any form or by any means—electronic, mechanical, magnetic, optical, chemical, manual, or otherwise—without express written permission and consent from CYP (UK) Ltd.

© Copyright 2011 by CYP (UK) Ltd.

All Rights Reserved.

Version 1.1 August 2011

## **TRADEMARK ACKNOWLEDGMENTS**

All products or service names mentioned in this document may be trademarks of the companies with which they are associated.

## SAFETY PRECAUTIONS

Please read all instructions before attempting to unpack, install or operate this equipment and before connecting the power supply.

Please keep the following in mind as you unpack and install this equipment:

- Always follow basic safety precautions to reduce the risk of fire, electrical shock and injury to persons.
- To prevent fire or shock hazard, do not expose the unit to rain, moisture or install this product near water.
- Never spill liquid of any kind on or into this product.
- Never push an object of any kind into this product through any openings or empty slots in the unit, as you may damage parts inside the unit.
- Do not attach the power supply cabling to building surfaces.
- Use only the supplied power supply unit (PSU). Do not use the PSU if it is damaged.
- Do not allow anything to rest on the power cabling or allow any weight to be placed upon it or any person walk on it.
- To protect the unit from overheating, do not block any vents or openings in the unit housing that provide ventilation and allow for sufficient space for air to circulate around the unit.

## REVISION HISTORY

VERSION NO.	DATE	SUMMARY OF CHANGE
v1.00	20/06/2018	First release

# CONTENTS

<b>1. Introduction</b> .....	<b>6</b>
<b>2. Applications</b> .....	<b>6</b>
<b>3. Package Contents</b> .....	<b>6</b>
<b>4. System Requirements</b> .....	<b>7</b>
<b>5. Features</b> .....	<b>7</b>
<b>6. Operation Controls and Functions</b> .....	<b>8</b>
6.1 Front Panel .....	8
6.2 Rear Panel.....	9
6.3 RS-232 Protocol.....	10
6.4 RS-232 Commands.....	11
<b>7. Connection Diagram</b> .....	<b>14</b>
<b>8. Specifications</b> .....	<b>15</b>
8.1 Technical Specifications .....	15
8.2 Video Specifications.....	16
8.3 Cable Specifications .....	18
<b>9. Acronyms</b> .....	<b>19</b>

## 1. INTRODUCTION

This Transmitter is an HDMI/VGA switch with audio embedding and HDBaseT output. The wall plate is designed for use with UK two-gang sized enclosures. This Transmitter can send high definition uncompressed audio/video along with Ethernet over a single cable up to a distance of 100 metres at 1080p@60Hz.

The HDMI input supports resolutions up to 4K@60Hz (4:4:4, 8-bit). The VGA input supports resolutions up to WUXGA (RB) and with the use of the associated 3.5mm audio input, stereo audio may be embedded as well. To provide maximum compatibility with a wide range of display types, all sources will be automatically scaled to match the preferred resolution and timing of the connected display (as reported by the display's EDID). Despite HDBaseT's 10.2Gbps bandwidth limitation, even 4K UHD HDMI video sources, up to and including 4K@60Hz (4:4:4, 8-bit), can be supported by converting the signal to 4K@30Hz when necessary.

This unit also supports automatic input selection between the HDMI and VGA inputs, with hot plug detection, enabling hands-free operation. Additionally, the unit may be powered locally or via 48V PoH (Power over HDBaseT) from a compatible HDBaseT Receiver, which allows for greater flexibility in installations.

## 2. APPLICATIONS

- /// Household entertainment sharing and control
- /// Lecture room display and control
- /// Showroom display and control
- /// Meeting room presentation and control
- /// Classroom display and control

## 3. PACKAGE CONTENTS

- /// 1xHDMI/VGA over HDBaseT Transmitter (with LAN support)
- /// 1xOperation Manual

## 4. SYSTEM REQUIREMENTS


- /// HDMI source equipment such as a media player, video game console or set-top box.
- /// HDMI receiving equipment such as an HDTV, monitor or audio amplifier.
- /// The use of industry standard Cat.6, Cat.6a or Cat.7 cable is highly recommended.
- /// The use of “Premium High Speed HDMI” cables is highly recommended.

## 5. FEATURES

- /// HDMI 2.0 and DVI 1.0 compatible
- /// HDCP 2.2 and HDCP 1.x compliant
- /// 1 HDMI input
- /// 1 VGA input with 3.5mm mini-jack audio input
- /// Supports HDMI input resolutions up to 4K@60Hz (4:4:4, 8-bit)
- /// Supports VGA input resolutions up to WUXGA (RB)
- /// Automatic conversion of 4K@50/60Hz HDMI sources to 4K@30Hz (4:4:4, 8-bit) for transmission over HDBaseT
- /// Automatic scaling of sources to match the native resolution of the HDMI display based on EDID
- /// HDBaseT feature support: HD Video and Audio, 48V PoH, and Control (Ethernet bypass)
- /// Simultaneous transmission of uncompressed video, audio and data over a single 100m Cat.5e/6/7 cable at 1080p and 70m at 4K
- /// Automatic input selection with hot plug detection enabling handsfree operation
- /// Unit may be powered locally or via 48V PoH (PD) from a compatible HDBaseT Receiver (PSE)
- /// Wall plate is designed for UK two-gang sized enclosures
- /// Controllable via front panel buttons and RS-232 (remote only)
- /// Front panel LEDs indicate input selection, power and link status

## 6. OPERATION CONTROLS AND FUNCTIONS


### 6.1 Front Panel

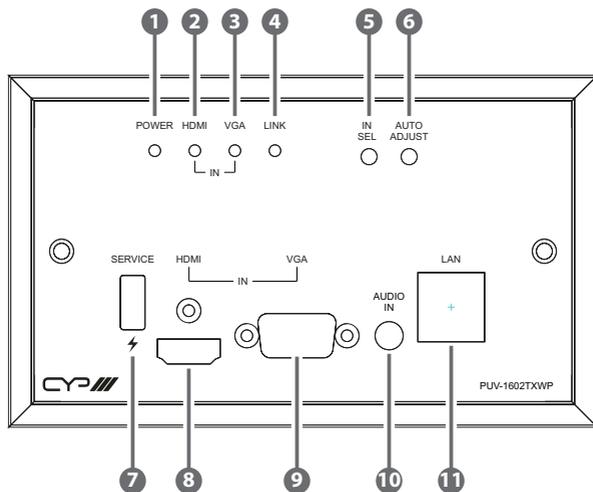

- 1 POWER LED:** This LED will illuminate to indicate the unit is on and receiving power.
- 2 HDMI IN LED:** This LED will illuminate when HDMI is the selected source.
- 3 VGA IN LED:** This LED will illuminate when VGA is the selected source.
- 4 LINK LED:** This LED will illuminate solid when both Transmitter and Receiver are connected and communicating with each other properly.
- 5 IN SEL:** Press this button to switch between the available inputs. The LED will illuminate to indicate which source is currently selected.
- 6 AUTO ADJUST:** Press this button to optimise the positioning of the picture (VGA sources only).  
*Note: Pressing and holding the Auto Adjust button for 5 seconds while the HDMI input is selected will reset the unit to its factory defaults.*
- 7 SERVICE:** This slot is reserved for firmware update use only.
- 8 HDMI IN:** Connect to HDMI source equipment such as a media player, game console or set-top box.
- 9 VGA IN:** Connect to VGA source equipment such as a PC or laptop.

- 10 **AUDIO IN:** Connect to the stereo analogue output of a device such as a CD player or PC for embedding into the HDBaseT output.
- 11 **LAN:** Connect directly, or through a network switch, to your PC/laptop to control the unit.

## 6.2 Rear Panel

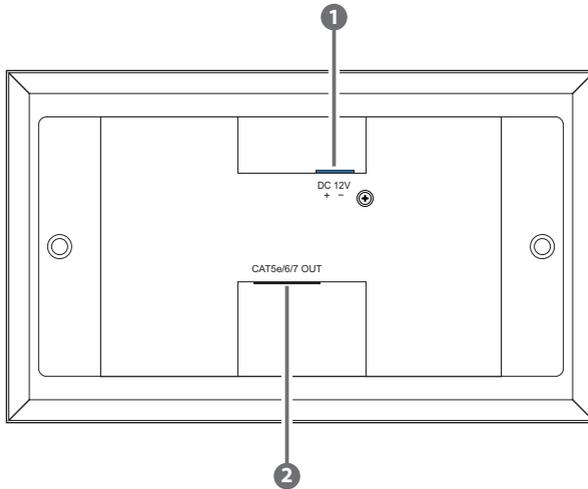

- 1 **DC 12V:** Plug a 12V DC power adapter into this port and connect it to an AC wall outlet for power (optional, not required when powered by PoH).
- 2 **CAT5e/6/7 OUT:** Connect to a compatible HDBaseT Receiver with a single Cat.5e/6/7 cable for transmission of all data signals.

### 6.3 RS-232 Protocol

TX		RX	
Pin	Pinout	Pin	Pinout
1		1	
2	TxD	2	RxD
3	RxD	3	TxD
4		4	
5	GND	5	GND
6		6	
7		7	
8		8	
9		9	

## 6.4 RS-232 Commands


COMMAND	DESCRIPTION AND PARAMETERS
<b>HELP</b>	Show the full command list.
<b>?</b>	Show the full command list.
<b>GET FW VER</b>	Show the unit's firmware version.
<b>GET MODEL NAME</b>	Show the unit's model name.
<b>SET FACTORY DEFAULT</b>	Reset all settings to the factory defaults.
<b>SET OUT A ROUTE N1</b>	Select the input source.  Available values for N1: 1           [HDMI] 2           [VGA]
<b>GET OUT A ROUTE</b>	Show the current input source.
<b>SET OUT AUTO MODE N1</b>	Set the auto source select mode.  Available values for N1: 0           [OFF] 1           [Auto Switch]
<b>GET OUT AUTO MODE</b>	Show the current auto source select mode.
<b>GET OUT AUTO MODE LIST</b>	List all available auto source modes.
<b>GET IN N1 TIMING</b>	Show the video timing of the source connected to input N1.  Available values for N1: 1           [HDMI] 2           [VGA]
<b>GET IN TYPE LIST</b>	List all available input types.

COMMAND	DESCRIPTION AND PARAMETERS																				
<b>SET FIX TIMING MODE N1</b>	<p>Set the scaler's output mode.</p> <p>Available values for N1:</p> <table> <tr><td>0</td><td>[Bypass]</td></tr> <tr><td>1</td><td>[Auto]</td></tr> <tr><td>2</td><td>[480P@60Hz]</td></tr> <tr><td>3</td><td>[720P@50Hz]</td></tr> <tr><td>4</td><td>[720P@60Hz]</td></tr> <tr><td>5</td><td>[1080P@50Hz]</td></tr> <tr><td>6</td><td>[1080P@60Hz]</td></tr> <tr><td>7</td><td>[4K@24Hz]</td></tr> <tr><td>8</td><td>[4K@25Hz]</td></tr> <tr><td>9</td><td>[4K@30Hz]</td></tr> </table>	0	[Bypass]	1	[Auto]	2	[480P@60Hz]	3	[720P@50Hz]	4	[720P@60Hz]	5	[1080P@50Hz]	6	[1080P@60Hz]	7	[4K@24Hz]	8	[4K@25Hz]	9	[4K@30Hz]
0	[Bypass]																				
1	[Auto]																				
2	[480P@60Hz]																				
3	[720P@50Hz]																				
4	[720P@60Hz]																				
5	[1080P@50Hz]																				
6	[1080P@60Hz]																				
7	[4K@24Hz]																				
8	[4K@25Hz]																				
9	[4K@30Hz]																				
<b>GET FIX TIMING MODE</b>	Show the scaler's current output mode.																				
<b>SET FIX Colour SPACE N1</b>	<p>Set the output colour space.</p> <p>Available values for N1:</p> <table> <tr><td>0</td><td>[RGB]</td></tr> <tr><td>1</td><td>[YUV 4:4:4]</td></tr> </table>	0	[RGB]	1	[YUV 4:4:4]																
0	[RGB]																				
1	[YUV 4:4:4]																				
<b>GET FIX Colour SPACE</b>	Show the current output colour space.																				
<b>GET OUT A TIMING</b>	Show the video timing of the output.																				
<b>SET AUDIO OUT A ROUTE N1</b>	<p>Select the audio source.</p> <p>Available values for N1:</p> <table> <tr><td>1</td><td>[HDMI Audio]</td></tr> <tr><td>2</td><td>[Analogue Audio]</td></tr> </table>	1	[HDMI Audio]	2	[Analogue Audio]																
1	[HDMI Audio]																				
2	[Analogue Audio]																				
<b>GET AUDIO OUT A ROUTE</b>	Show the currently selected audio source.																				
<b>GET AUDIO IN TYPE LIST</b>	List all available audio sources.																				

COMMAND	DESCRIPTION AND PARAMETERS
<b>SET IN 1 HDCP MODE N1</b>	Set the HDCP mode for the HDMI input.  Available values for N1: 0 [Disable HDCP] 1 [Follow Source] 2 [Follow Display]
<b>GET IN 1 HDCP MODE</b>	Show the current HDCP mode for the HDMI input.
<b>SET IN 1 EDID N1</b>	Set the EDID to use with the HDMI input.  Available values for N1: 1 [1080P, 2CH] 2 [4K (3G), 2CH] 3 [4K (6G), 2CH] 4 [Output's EDID]
<b>GET IN 1 EDID</b>	Show the currently selected EDID source for the HDMI input.
<b>GET IN EDID LIST</b>	List all available EDID sources.

*Note: Commands will not be executed unless followed by a carriage return. Commands are not case-sensitive.*

## 7. CONNECTION DIAGRAM

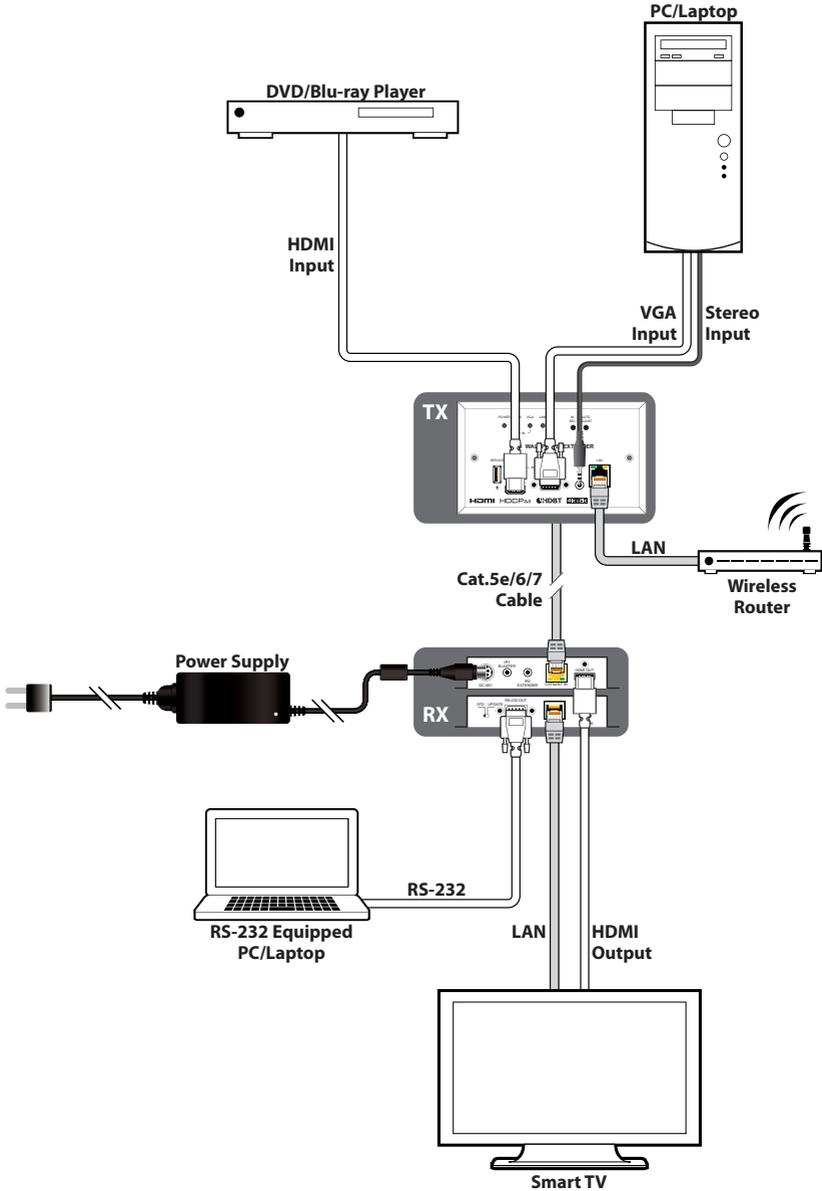

## 8. SPECIFICATIONS

### 8.1 Technical Specifications

<b>HDMI Bandwidth</b>	600MHz/18Gbps
<b>HDBaseT Bandwidth</b>	340Hz/10.2Gbps
<b>Input Ports</b>	1×HDMI 1×VGA 1×3.5mm (Stereo Audio)
<b>Output Port</b>	1×Cat.5e/6/7
<b>Pass-through Port</b>	1×LAN [RJ-45]
<b>Baud Rate</b>	19200bps
<b>Power Supply</b>	12V/3A DC (US/EU standards, CE/FCC/UL certified)
<b>ESD Protection</b>	Human Body Model: ±8kV (Air Discharge) ±4kV (Contact Discharge)
<b>Dimensions</b>	147mm×87.5mm×41.5mm (W×H×D) [Case Only] 147mm×87.5mm×46.6mm (W×H×D) [All Inclusive]
<b>Weight</b>	250g
<b>Chassis Material</b>	Metal
<b>Silkscreen Colour</b>	White
<b>Operating Temperature</b>	0°C - 40°C/32°F - 104°F
<b>Storage Temperature</b>	-20°C - 60°C/-4°F - 140°F
<b>Relative Humidity</b>	20 - 90% RH (Non-condensing)
<b>Power Consumption</b>	26.84W

## 8.2 Video Specifications

Supported PC Resolutions (Hz)		Input		Output
		HDMI	VGA	HDMI via HDBaseT
<b>640x480</b>	60, 72, 75, 85	✓	✓	✓
<b>720x400</b>	85	✓	✓	✓
<b>800x600</b>	56, 60, 72, 75, 85	✓	✓	✓
<b>1024x768</b>	60, 70, 75, 85	✓	✓	✓
<b>1152x864</b>	75	✓	✓	✓
<b>1280x768</b>	60, 75, 85	✓	✓	✓
<b>1280x800</b>	60 (RB), 60	✓	✓	✓
<b>1280x960</b>	60	✓	✓	✓
<b>1280x1024</b>	60	✓	✓	✓
<b>1360x768</b>	60	✓	✓	✓
<b>1366x768</b>	60 (RB), 60	✓	✓	60 (RB)
<b>1400x1050</b>	60 (RB), 60	✓	✓	✓
<b>1440x900</b>	60 (RB), 60	✓	✓	✓
<b>1600x1200</b>	60	✓	✓	✓
<b>1680x1050</b>	60 (RB), 60	✓	✓	✓
<b>1920x1200</b>	60	✓	✓	✓
<b>1920x1440</b>	60	✓		✓
<b>2560x1600</b>	60	✓		✓

Supported TV Resolutions (Hz)		Input		Output
		HDMI	VGA	HDMI via HDBaseT
<b>720×480i</b>	59.94, 60	✓		
<b>720×576i</b>	50	✓		
<b>720×480p</b>	59.94, 60	✓	✓	✓
<b>720×576p</b>	50	✓	✓	✓
<b>1280×720p</b>	50, 59.94, 60	✓	✓	✓
<b>1920×1080i</b>	50, 59.94, 60	✓		
<b>1920×1080p</b>	23.97, 24, 25, 29.97, 30	✓	✓	✓
	50, 59.94, 60	✓	✓	✓
<b>3840×2160p (YUV 4:2:0)</b>	50, 59.94, 60	✓		
<b>4096×2160p (YUV 4:2:0)</b>	50, 59.94, 60	✓		
<b>3840×2160p</b>	24, 25, 30	✓		✓
	50, 59.94, 60	✓		
<b>4096×2160p</b>	24, 25, 30	✓		✓
	50, 59.94, 60	✓		

### 8.3 Cable Specifications

HDMI Cable Length (meter)	1080p		4K
	8-bit	12-bit	8-bit
<b>Input</b>	10	10	5
<b>Output</b>	10	10	5

Cat. Cable Length (meter)	1080p	4K
<b>Cat.5e</b>	100	70
<b>Cat.6</b>	100	70
<b>Cat.7</b>	100	100

#### Full HD Video (1080p)

- Up to 1080p@60Hz, 12-bit colour
- Data rates lower than 5.3Gbps or below 225MHz TMDS clock

#### Ultra HD Video (4K)

- 4K@24/25/30Hz & 4K@50/60Hz (YUV 4:2:0), 8-bit colour
- Data rates higher than 5.3Gbps or above 225MHz TMDS clock

## 9. ACRONYMS

ACRONYM	COMPLETE TERM
<b>Cat.5e</b>	Category 5 (enhanced) Cable
<b>Cat.6</b>	Category 6 Cable
<b>Cat.7</b>	Category 7 Cable
<b>CEC</b>	Consumer Electronics Control
<b>DVI</b>	Digital Visual Interface
<b>HD</b>	High-Definition
<b>HDCP</b>	High-bandwidth Digital Content Protection
<b>HDMI</b>	High-Definition Multimedia Interface
<b>LAN</b>	Local Area Network
<b>LPCM</b>	Linear Pulse-Code Modulation
<b>PD</b>	Powered Device
<b>PoH</b>	Power over HDBaseT
<b>PSE</b>	Power Sourcing Equipment
<b>UHD</b>	Ultra-High-Definition
<b>VGA</b>	Video Graphics Array
<b>WUXGA</b>	Wide Ultra Extended Graphics Array



---

CYP (UK) Ltd., Unit 7, Shepperton Business Park, Govett Avenue, Shepperton,  
Middlesex, TW17 8BA

Tel: +44 (0) 20 3137 9180 | Fax: +44 (0) 20 3137 6279

Email: [sales@cypeurope.com](mailto:sales@cypeurope.com)

[www.cypeurope.com](http://www.cypeurope.com)

v1.00