
UEF ACOUSTIC DOTS PLACEMENT GUIDE


PLACEMENT: For temporary placement and testing, clean wall thoroughly with alcohol or a household degreaser. Attach a small amount of the included "white tac" to the back (label side) of the UEF Acoustic Dot. Follow the included guide for mounting placement. Once the final position has been decided, you can use the "white tac" as the final mounting material or for a more permanent placement, remove the film from the back of the UEF Acoustic Dot and place on wall.

CAUTION: Placement with adhesive back overtime may become permanent and cause damage to mounting surface when removed.


CLEANING: Do not use liquid cleaners or damage may occur. We recommend using pressurized air, soft bristled paint brush or a feather duster

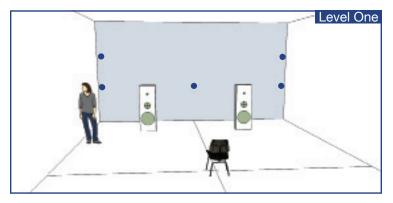


- Place (1) Dot at center of front wall.
- Place (2) Dots at left side of front wall, (1) at 4-5 ft. above floor and (1) at 5-6 ft.
- Place (2) Dots at left side of front wall, (1) at 4-5 ft. above floor and (1) at 5-6 ft.

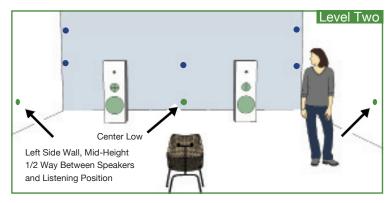

- Place (1) Dot low and center of front wall.
- Place (1) Dot at center of left-side wall, mid-height and halfway between speakers and listening position.
- Place (1) Dot at center of right-side wall, mid-height and halfway between speakers and listening position.

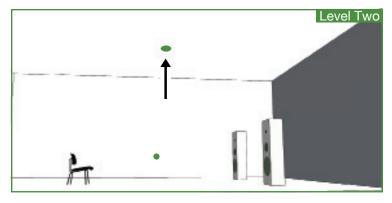


• Place (1) Dot on center of ceiling, halfway between speakers and listening position.

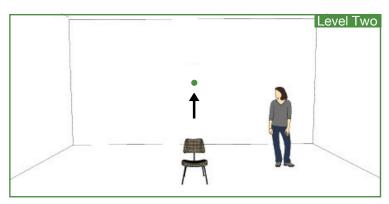


• Place (1) Dot on center of back wall, centered and 6 ft. or higher above floor.






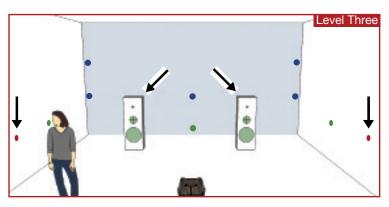


- Place (1) Dot behind left speaker.
- Place (1) Dot behind right speaker.
- Place (1) Dot on left-side wall, mid-height and slightly behind listening position.
- Place (1) Dot on right-side wall, mid-height and slightly behind listening position.

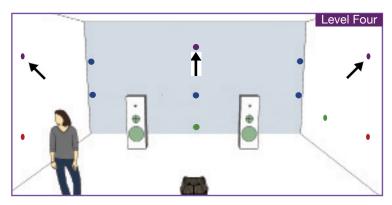


- Place (1) Dot at center-high on front wall.
- Place (1) Dot high above left side Dot.
- Place (1) Dot high above right side Dot.

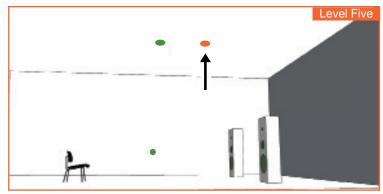


• Place (1) Dot within the center of ceiling, halfway between speakers and first Dot.

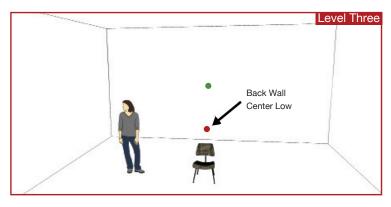

• Place (1) Dot low and center of back wall.

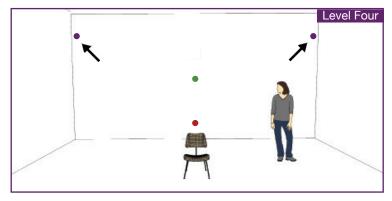


- Place (1) Dot high on left side of back wall.
- Place (1) Dot high on right side of back wall.

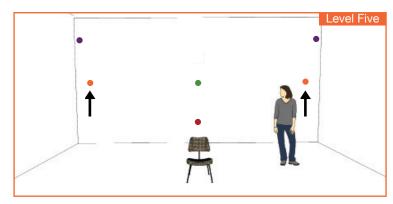

- Place (1) Dot mid-height on back wall, one foot in from right wall.
- Place (1) Dot mid-height on back wall, one foot in from left wall.



• Place (1) Dot mid-height on right wall, slightly in front of speaker plane.

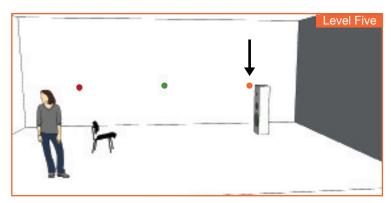

• Place (1) Dot mid-height on left wall, slightly in front of speaker plane.